

TWIN ENTRANCE & CORNER SHOWER SOLUTIONS



- Tray slab** 2000 x 1110 x 45mm
Tray slab can be sunk or exposed
- Glass walls** Height: 2044mm
Sides: 10mm safety glass to BS6206A
Front: 8mm safety glass to BS6206A
Glass walls factory UV bonded
Treated with Matki Glass Guard Easy Clean
- Column** 2195 x 50mm diameter chromed brass
- Overall Height** 2240mm including tray slab
- Shower** EauZone Thermostatic Mixer
Chromed brass handset
200mm Deluge shower head
6x body jets
Fastflow shower waste, (Diagram. a)

A minimum 3 bar shower pump or equivalent water pressure is recommended.

The dimensions shown are for shower floor.

Height of shower floor 45mm.

Please note that the EauZone glass sections are factory fused and glass pack sizes are 2 off 2130mm x 1050mm x 460mm. Weight 80kg each. Consideration should be given to handling and access.

The EauZone design will contain most shower spray during normal use. Some spray may extend beyond the entrance, and we recommend tiling of the adjacent area.

Configurations

All EauZone corner surrounds are handed. Please specify left or right hand configuration.

Matki EauZone can be provided without its tray slab for fitting onto a tiled wetroom floor.

On corner models wall mount can be fitted onto tiles or rebated.



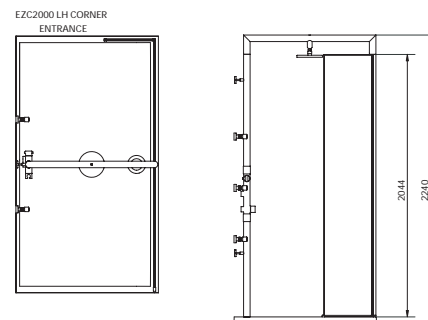


Diagram. a Matki Fastflow Shower Waste

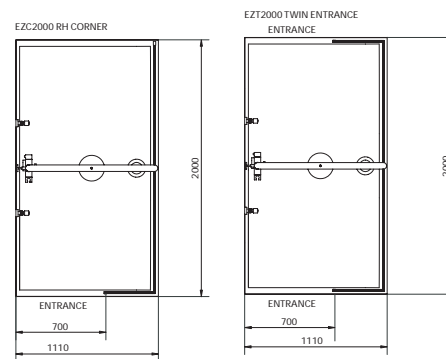

TWIN ENTRANCE & CORNER SHOWER SOLUTIONS

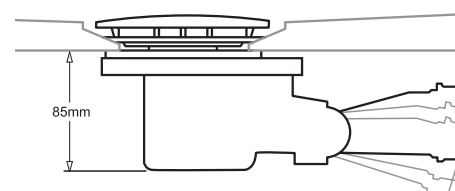

Tray slab exposed



Corner Shower

- Tray slab** 1500 x 960 x 45mm
- Glass walls** Height: 2044mm
Sides: 10mm safety glass to BS6206A
Front: 8mm safety glass to BS6206A
Glass walls factory UV bonded
Treated with Matki Glass Guard Easy Clean
- Column** 2195 x 50mm diameter chromed brass
- Overall Height** 2240mm including tray slab
- Shower** EauZone Thermostatic Mixer
Chromed brass handset
200mm Deluge shower head
Fastflow shower waste, (*Diagram. a*)

A minimum 1 bar shower pump or equivalent water pressure is recommended.

The dimensions shown are for shower floor.

Height of shower floor 45mm.

Please note that the EauZone glass sections are factory fused and glass pack sizes are 2 off 2130mm x 1050mm x 460mm. Weight 70kg each. Consideration should be given to handling and access.

The EauZone design will contain most shower spray during normal use. Some spray may extend beyond the entrance, and we recommend tiling of the adjacent area.

Configurations

All EauZone corner surrounds are handed. Please specify left or right hand configuration.

Matki EauZone can be provided without its tray slab for fitting onto a tiled wetroom floor.

On corner models wall mount can be fitted onto tiles or rebated.



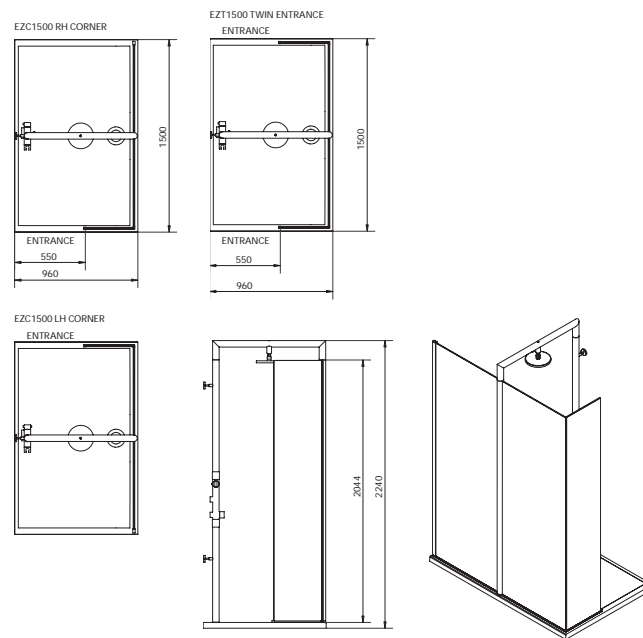


Diagram. a Matki Fastflow Shower Waste

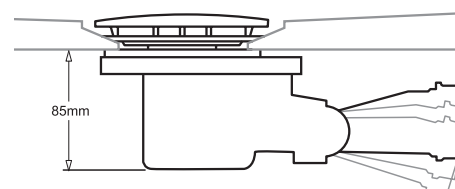

FRONT ENTRANCE, CORNER & RECESS SHOWER SOLUTIONS

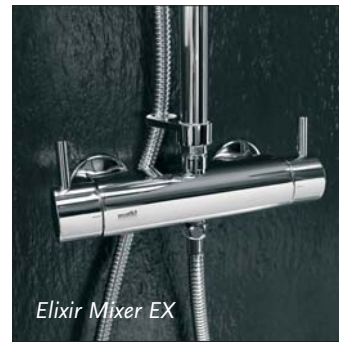

- Tray** 1500 x 960 x 60mm
Tray can be sunk or exposed
- Glass walls** Height: 2044mm
Side: 10mm safety glass to BS6206A
Front/panel: 8mm safety glass to BS6206A
Glass walls factory UV bonded
Treated with Matki Glass Guard Easy Clean
- Column EZ** 2195 x 50mm diameter chromed brass
- Column EX** 2195 x 24 and 50mm
- Overall Height** 2255mm including tray
- Shower** EauZone or Elixir Thermostatic Mixer
EZ models: Chromed brass handset
EX models: Chromed plastic multi-function handset
200mm Deluge shower head
Fastflow shower waste, (Diagram. a)

A minimum 1 bar shower pump or equivalent water pressure is recommended.

The dimensions shown are for shower floor.

Height of shower floor 60mm.

Please note that the EauZone glass sections are factory fused and glass pack size is 2130mm x 1050mm x 570mm. Weight 70kg.

Consideration should be given to handling and access.

The EauZone design will contain most shower spray during normal use. Some spray may extend beyond the entrance, and we recommend tiling of the adjacent area.

Configurations

All EauZone front entrance surrounds are handed. Please specify left or right hand configuration.

Matki EauZone can be provided without its tray for fitting onto a tiled wetroom floor.


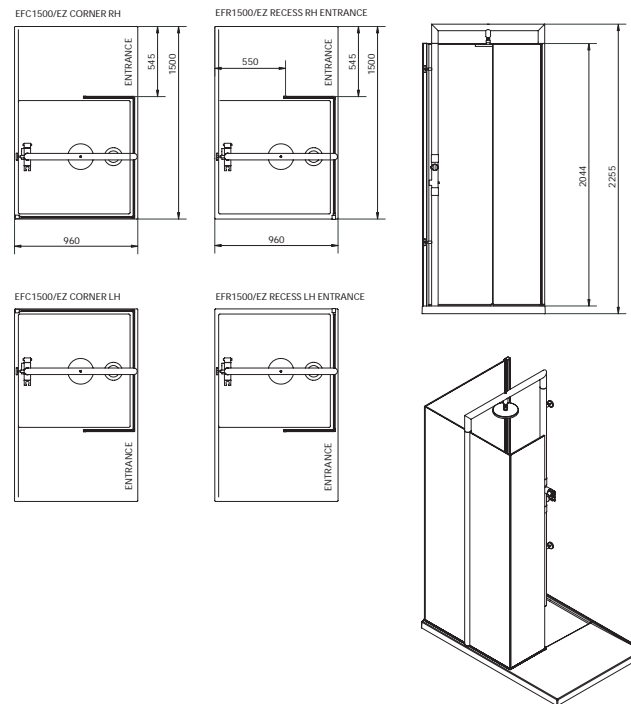


Diagram. a Matki Fastflow Shower Waste



CORNER & RECESS SHOWER SOLUTIONS WITH DOOR

1000, 1200 AND 1500MM EAUZONE

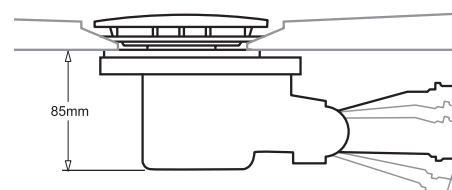



- Tray** 1000 x 900, 1200 and 1500 x 960 x 60mm
- Glass walls** Height: 2044mm
Sides: 8mm safety glass to BS6206A
Door: 8mm safety glass to BS6206A
Treated with Matki Glass Guard Easy Clean
- Column EZ** 2195 x 50mm diameter chromed brass
- Column EX** 2195 x 24 and 50mm
- Overall Height** 2255mm including tray
- Shower** EauZone or Elixir Thermostatic Mixer
EZ models: Chromed brass handset
EX models: Chromed plastic multi-function handset
200mm Deluge shower head
Fastflow shower waste, (*Diagram. a*)

A minimum 1 bar shower pump or equivalent water pressure is recommended.
The dimensions shown are for shower tray. Height of shower tray 60mm.

Configurations

All EauZone surrounds with door are handed. Please specify left or right hand configuration.

Diagram. a Matki Fastflow Shower Waste

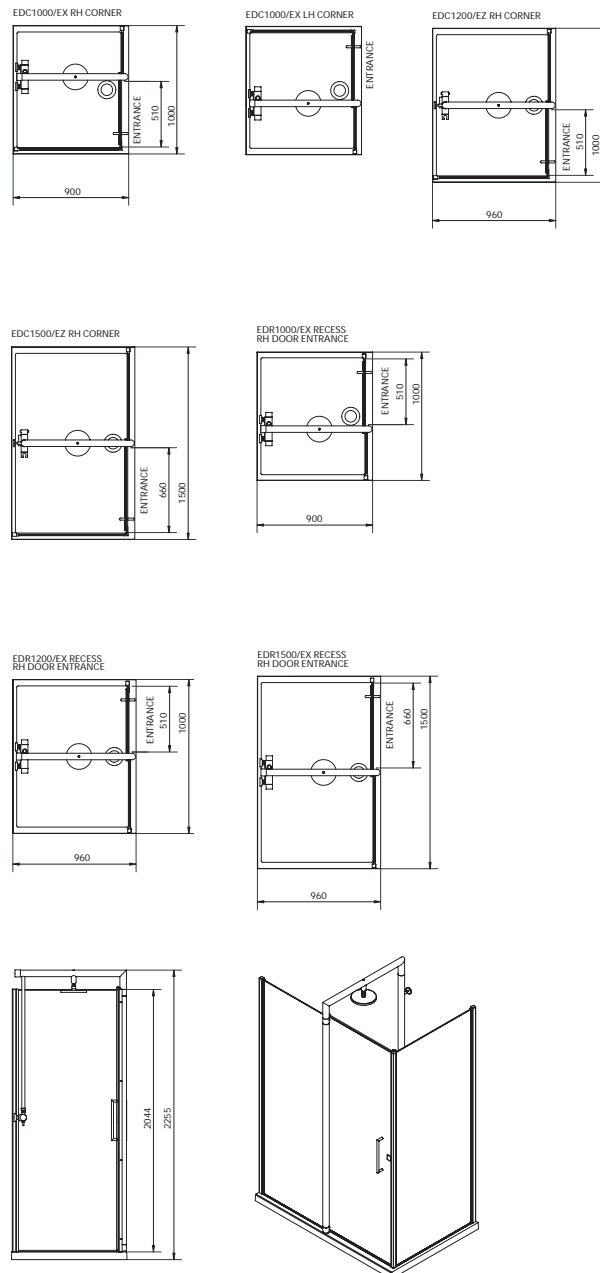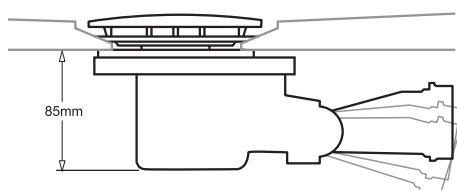

ABOVE ILLUSTRATION SHOWS A LEFT HAND CORNER. ON CORNER INSTALLATIONS DOOR ALWAYS CLOSSES AGAINST SIDE PANEL SIDE.

ABOVE DRAWINGS SHOW RIGHT HAND ILLUSTRATIONS ONLY FOR MODELS 1200 AND 1500. FOR LEFT HAND REVERSE ILLUSTRATIONS.